




MATERIAL DATASHEET 27

KE no.	ZW			
Material	Flame retardant Polyester fabric with PU coating			
Construction	PU-coating			
Weight	g/m²	200	(%) -/+5	EN-ISO 5077
Thickness	mm	0.23	(%) -/+10	EN-ISO 12127:1997
Permeability	m³/m²/h/120 Pa	0	(%) -0/+0	EN-ISO 9237:1995
Tensile strength	Warp/Weft N	1400/850	(%) -/+10	EN-ISO 13934-1
Resistance to tearing	Warp/Weft N	33/28	(%) -/+10	EN-ISO 13937:2
Production method	Laser cut			
Contains silicone	No			
Shrinkage in wash	% at 40°C	-		EN-ISO 5077
Operating temperature max./min.	°C	50/0		Max 90% RH
Water absorption	% at 90% RH	0.4		
Electrostatic resistance	Ohm	≤1.7 x 10 ¹¹		DIN 54345-1
Clean room classification		N/A		ISO-14644-1
Fire resistance		B-S1-d0 N/A		EN-13501 UL 723 NFPA 90 A
Melting point	°C	170		
Resistance to aging		Medium		
Resistance to vibrations, motion		Good		
Resistance to solvents		Not recommended		
Resistance to acids		Medium		
Resistance to bases		Medium		
Resistance to oxidants, light, etc.		Medium		

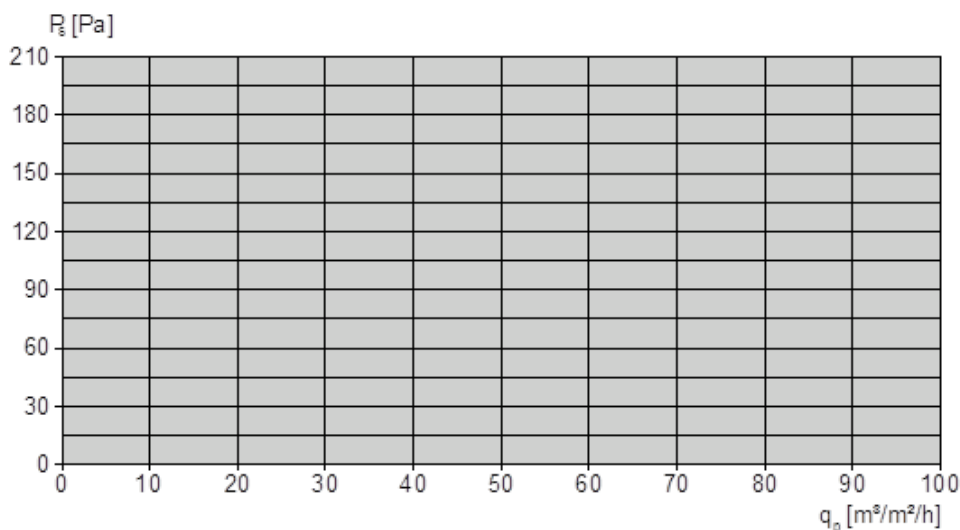

This document and all information thereon is the property of KE Fibertec AS. It must not be copied, imparted to a third party or used for any other purpose without the written consent of KE Fibertec AS.

12/2024

